

HIGH VOLTAGE RECTIFIERS

VOLTAGE RANGE: 1600 --- 2000 V

CURRENT: 1.0 A


■ FEATURES

- Molded case feature for auto insertion
- High current capability
- Low leakage current
- High surge capability

■ MECHANICAL DATA

- Case: JEDEC DO -41, molded plastic
- Terminals: Axial lead, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode
- Weight: 0.012 ounces, 0.34 grams
- Mounting position: Any

DO - 41

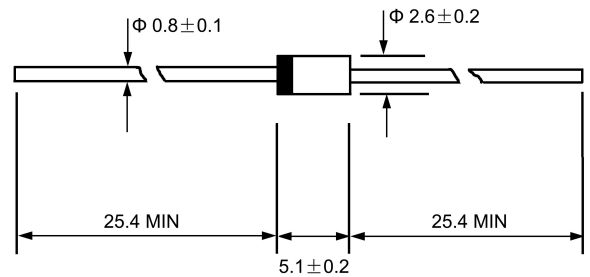

Dimensions in millimeters

■ MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		EM513	EM516	EM518	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	1600	1800	2000	V
Maximum RMS voltage	V_{RMS}	1120	1260	1400	V
Maximum DC blocking voltage	V_{DC}	1600	1800	2000	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0			A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	30			A
Maximum instantaneous forward voltage @ 1.0 A	V_F	1.1			V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	5.0 50.0			μA
Typical junction capacitance (Note1)	C_J	10			pF
Typical thermal resistance (Note2)	$R_{\theta JA}$	50			$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	- 55 ---- + 125			$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 ---- + 150			$^\circ\text{C}$

NOTE: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal resistance from junction to ambient at 0.375"(9.5mm) lead length, P.C.board mounted

■ RATINGS AND CHARACTERISTIC CURVES

FIG.1 – TYPICAL FORWARD CURRENT DERATING CURVE

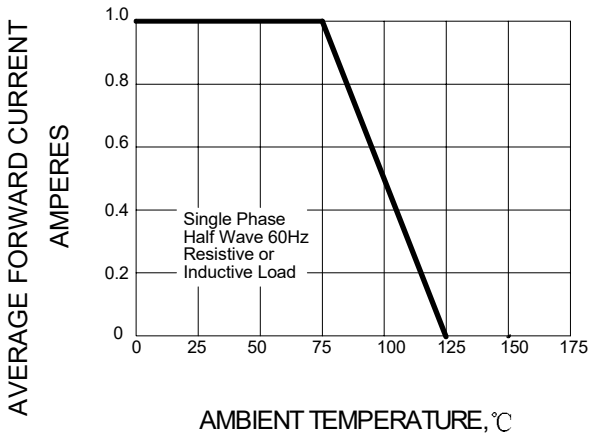


FIG.2 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

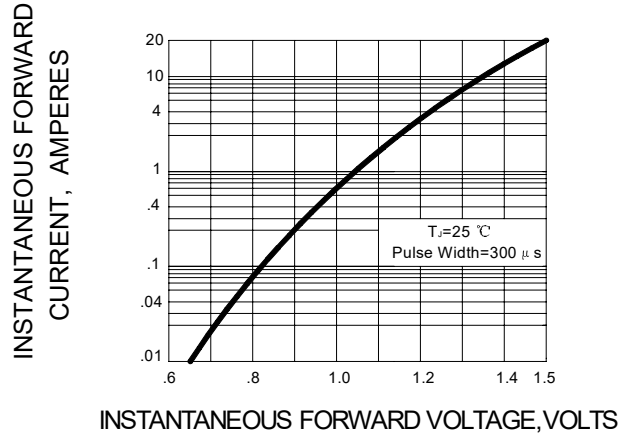


FIG.3 – MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

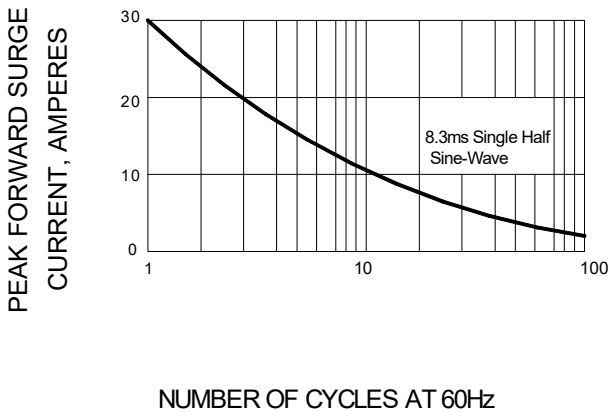


FIG.4 – TYPICAL REVERSE CHARACTERISTICS

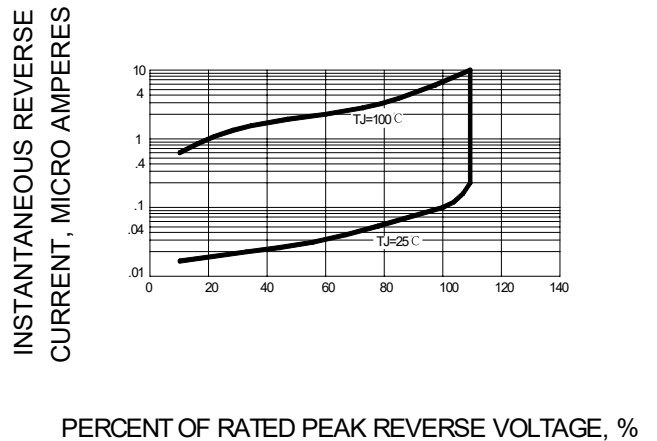


FIG.5 – TYPICAL JUNCTION CAPACITANCE

