

## SCHOTTKY BARRIER RECTIFIER

**VOLTAGE RANGE: 35 --- 200 V  
CURRENT:15.0A**


### FEATURES

- ◇ Metal-semiconductor junction with guard ring
- ◇ Epitaxial construction
- ◇ Low forward voltage drop, low switching losses
- ◇ High surge capability
- ◇ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ◇ The plastic material carries U/L recognition 94V-0

### MECHANICAL DATA

- ◇ Case: JEDEC TO-220AB, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Weight: 0.08ounces, 2.24 grams
- ◇ Mounting position: Any

### TO - 220AB

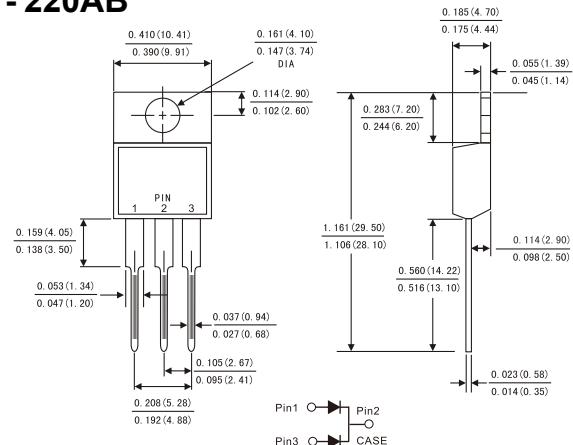

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

	Symbols	SR 1535CT	SR 1545CT	SR 1550CT	SR 1560CT	SR <b>15100CT</b>	SR 15150CT	SR 15200CT	Units
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	35	45	50	60	100	150	200	Volts
Maximum RMS voltage	V <sub>RMS</sub>	25	32	35	42	70	105	140	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	35	45	50	60	100	150	200	Volts
Maximum average forward rectified current (see Fig.1)	Per leg Total device	I <sub>(AV)</sub>				15.0			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)		I <sub>FSM</sub>				150.0			Amps
Maximum instantaneous forward voltage at 15 A	V <sub>F</sub>		0.60		0.75	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Note 1)	T <sub>c</sub> = 25°C T <sub>c</sub> = 125°C		I <sub>R</sub>		0.2				mA
				30		50			
Typical thermal resistance (Note 2)	R <sub>θJC</sub>				3.0				°C/W
Operating junction temperature range	T <sub>J</sub>				-65 to +150				°C
Storage temperature range	T <sub>STG</sub>				-65 to +150				°C

NOTE: 1. Pulse test: 300us pulse width, 1% duty cycle.


2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient


# RATINGS AND CHARACTERISTIC CURVES

**SR1535CT--- SR15200CT**


**FIG.1-FORWARD CURRENT DERATING CURVE**

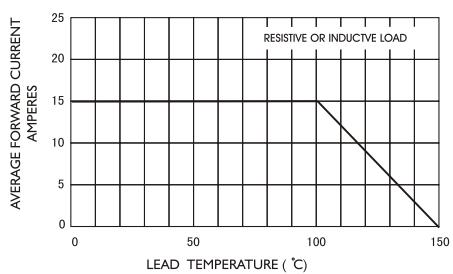


**FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

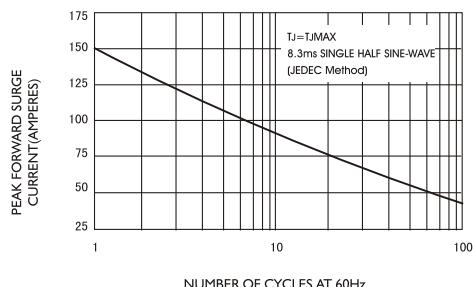


**FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

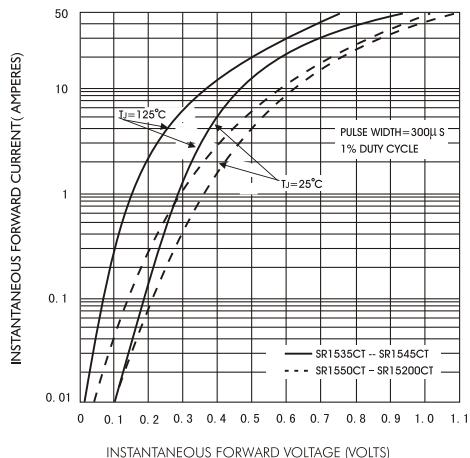

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

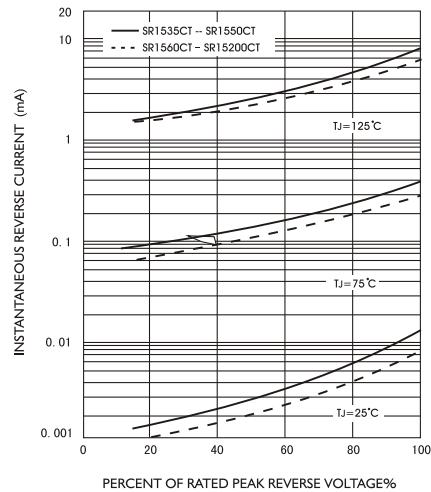

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

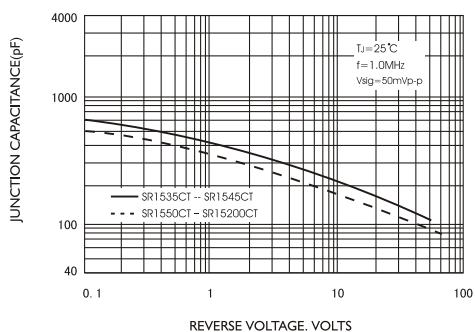

**FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE**

