

## SCHOTTKY BARRIER RECTIFIER

### FEATURES

- ◇ Metal-semiconductor junction with guard ring
- ◇ Epitaxial construction
- ◇ Low forward voltage drop, low switching losses
- ◇ High surge capability
- ◇ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ◇ The plastic material carries U/L recognition 94V-0


### MECHANICAL DATA

- ◇ Case: JEDEC TO-263, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Weight: 0.08ounces, 2.24 grams
- ◇ Mounting position: Any

**VOLTAGE RANGE: 20 --- 200 V**  
**CURRENT: 8.0A**

**TO - 263**

**D2PAK**

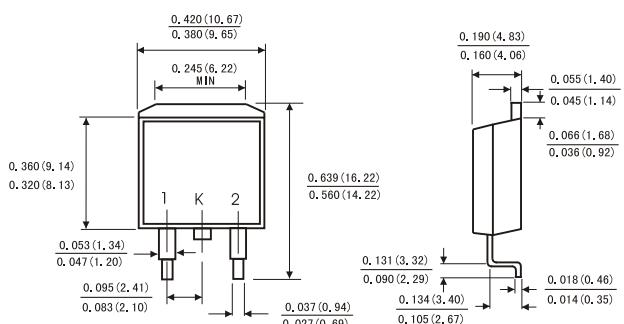

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

	Symbols	SR 820CT	SR 830CT	SR 840CT	SR 850CT	SR 860CT	SR 880CT	SR <b>8100CT</b>	SR 8150CT	SR 8200CT	Units								
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	Volts								
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	105	140	Volts								
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	Volts								
Maximum average forward rectified current (see Fig.1)	Per leg I <sub>(AV)</sub>	4.0 8.0							Amps										
Total device																			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	150.0							Amps										
Maximum instantaneous forward voltage at 8.0 A (Notes 1)	V <sub>F</sub>	0.60		0.75		0.85		0.90	0.95	Volts									
Maximum instantaneous reverse current at rated DC blocking voltage (Notes 1)	T <sub>A</sub> = 25°C T <sub>A</sub> = 125°C	I <sub>R</sub>	0.2		15		50		mA										
Typical thermal resistance (Notes 2)	R <sub>θJC</sub>	2.5							°C/W										
Operating junction temperature range	T <sub>J</sub>	-65 to +150							°C										
Storage temperature range	T <sub>STG</sub>	-65 to +150							°C										

NOTE: 1. Pulse test: 300μs pulse width, 1% duty cycle.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient

# RATINGS AND CHARACTERISTIC CURVES

SR820 --- SR8200

FIG.1-FORWARD CURRENT DERATING CURVE

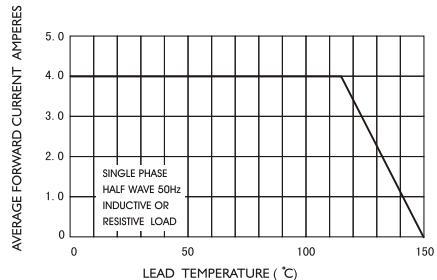


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

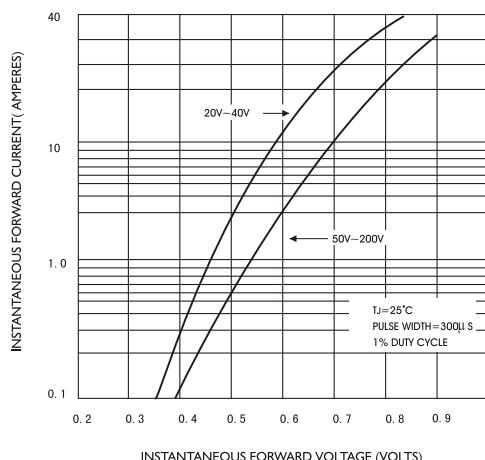


FIG.4-TYPICAL JUNCTION CAPACITANCE

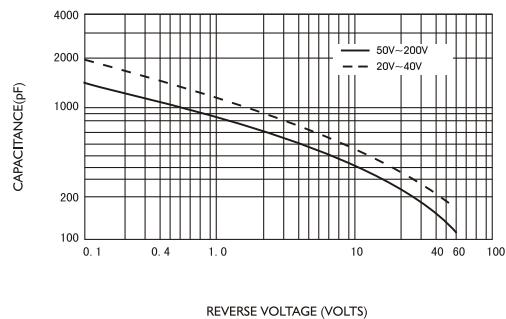


FIG.3-TYPICAL REVERSE CHARACTERISTICS

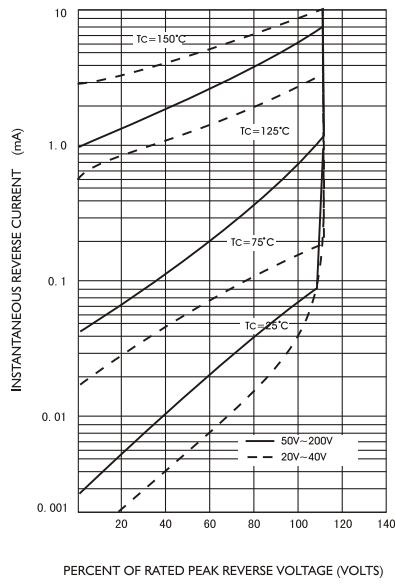


FIG.5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

