

SCHOTTKY BARRIER RECTIFIER

FEATURES


- ◇ Metal-semiconductor junction with guard ring
- ◇ Epitaxial construction
- ◇ Low forward voltage drop, low switching losses
- ◇ High surge capability
- ◇ For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC ITO-220AC, molded plastic
- ◇ Terminals: Axial lead, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Weight: 0.08ounces, 2.24 grams
- ◇ Mounting position: Any

**VOLTAGE RANGE: 20 --- 200 V
CURRENT: 20.0A**

ITO - 220AC

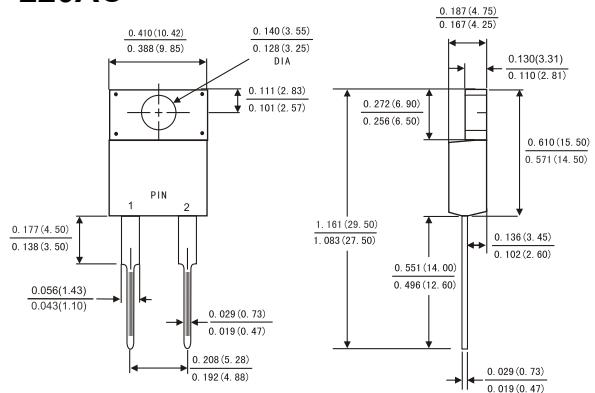

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

	Symbols	SRF 2020	SRF 2030	SRF 2040	SRF 2050	SRF 2060	SRF 2080	SRF 20100	SRF 20150	SRF 20200	Units				
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	Volts				
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	Volts				
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	Volts				
Maximum average forward rectified current See Fig. 1	I _(AV)	20.0							Amps						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	200.0							Amps						
Maximum instantaneous forward voltage at 20.0 A	V _F	0.60		0.75		0.85		0.90	0.95	Volts					
Maximum instantaneous reverse current at rated DC blocking voltage voltage (Note 1)	I _R	T _c = 25°C T _c = 125°C	0.2						mA						
			30		50		°C/W								
Typical thermal resistance (Note 2)	R _{θJC}	3.0							°C/W						
Operating junction temperature range	T _J	-65 to +150							°C						
Storage temperature range	T _{STG}	-65 to +150							°C						

NOTE: 1. Pulse test: 300us pulse width, 1% duty cycle.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance junction to ambient

RATINGS AND CHARACTERISTIC CURVES

SRF2020 --- SRF 20200

FIG.1-FORWARD CURRENT DERATING CURVE

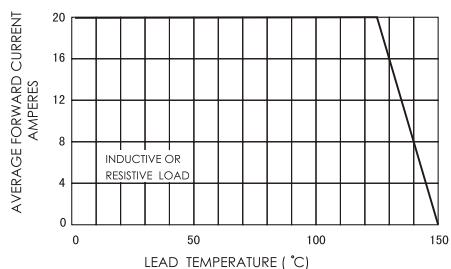


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

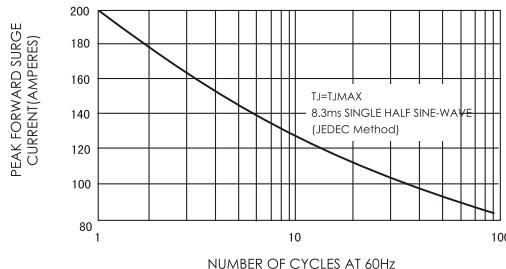


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

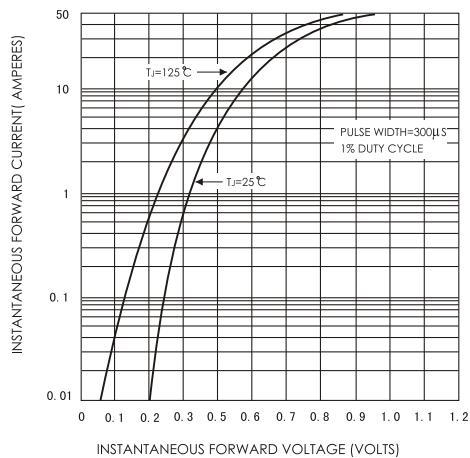


FIG.4-TYPICAL REVERSE CHARACTERISTICS

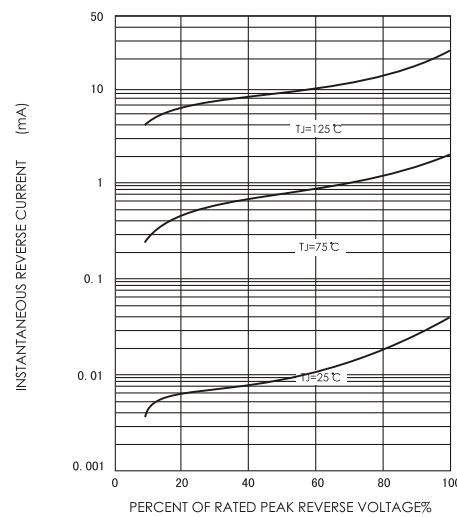


FIG.5-TYPICAL JUNCTION CAPACITANCE

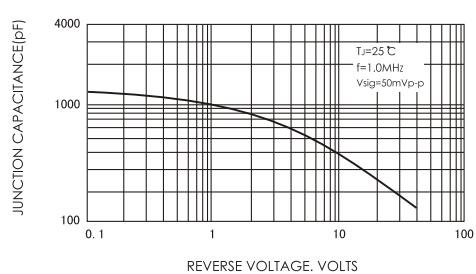


FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE

