

### ULTRA FAST RECTIFIER

REVERSE VOLTAGE: 50 - 1000 V  
FORWARD CURRENT: 2.0 A


#### FEATURES

- ◇ Plastic package has underwriters laboratories flammability classification 94V-0
- ◇ For surface mount applications
- ◇ Glass passivated chip junctions
- ◇ Low profile package
- ◇ Easy pick and place
- ◇ Ultrafast recovery times for high efficiency
- ◇ Low forward voltage, low power loss
- ◇ Built-in strain relief, ideal for automated placement
- ◇ High temperature soldering:  
250°C/10 seconds on terminals

#### MECHANICAL DATA

- ◇ Case: JEDEC DO-214AA, molded plastic body over passivated chip
- ◇ Terminals: Solder plated, solderable per MIL-STD-750, method 2026
- ◇ Polarity: Color band denotes cathode end
- ◇ Weight: 0.003 ounces, 0.093 gram

#### DO-214AA(SMB)

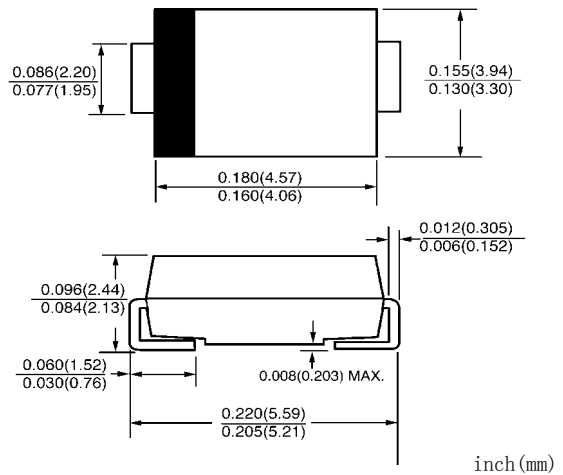

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified

		US2A	US2B	US2D	US2G	US2J	US2K	US2M	UNITS
Device marking code		US2A	US2B	US2D	US2G	US2J	US2K	US2M	
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RWS}$	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum average forward rectified current @ $T_L=90^\circ\text{C}$	$I_{F(AV)}$	2.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0							A
Maximum instantaneous forward voltage at 2A	$V_F$	1.0			1.7			V	
Maximum DC reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=125^\circ\text{C}$	$I_R$	10.0 200.0							$\mu\text{A}$
Maximum reverse recovery time at $I_F=0.5\text{A}$ $I_R=1.0\text{A}$ $I_{tr}=0.25\text{A}$	$t_{rr}$	50			75			ns	
Typical junction capacitance at 4.0V, 1MHz	$C_J$	50			30			pF	
Maximum thermal resistance (NOTE1)	$R_{\theta JA}$ $R_{\theta JL}$	40.0 15.0							$^\circ\text{C/W}$
Operating temperature range	$T_J$	-55-----+150							$^\circ\text{C}$
Storage temperature range	$T_{STG}$	-55-----+150							$^\circ\text{C}$


NOTE: 1.P.C.B.mounted on 0.2X0.2"(5.0X5.0mm)copper pad area

www.diode.co.kr


**FIG.1 – FORWARD CURRENT DERATING CURVE**

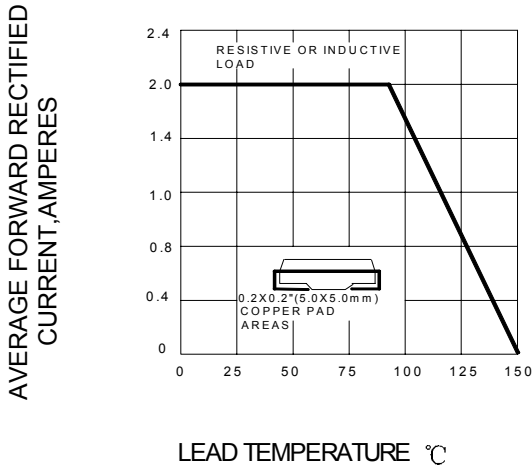


**FIG.2 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

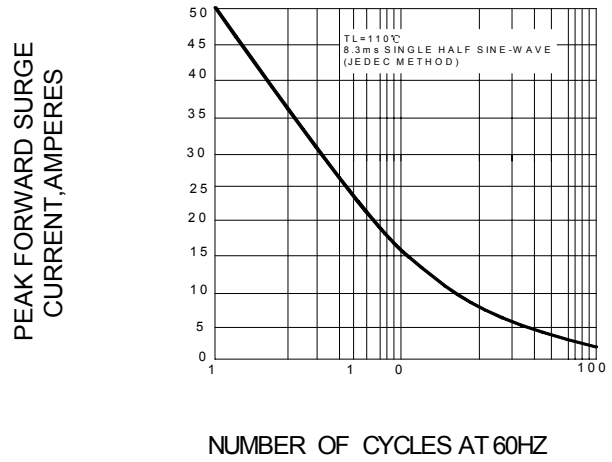


**FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

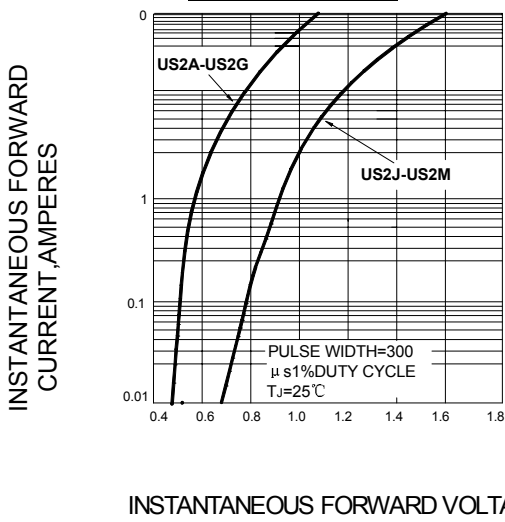

**FIG.4 – TYPICAL REVERSE CHARACTERISTICS**

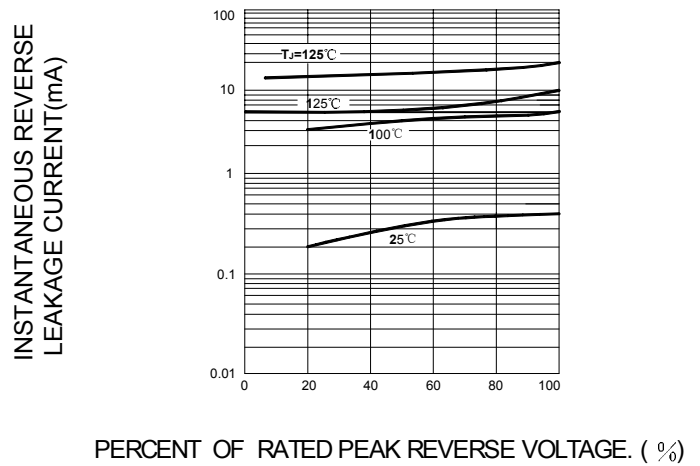

**FIG.5 – TYPICAL JUNCTION CAPACITANCE**

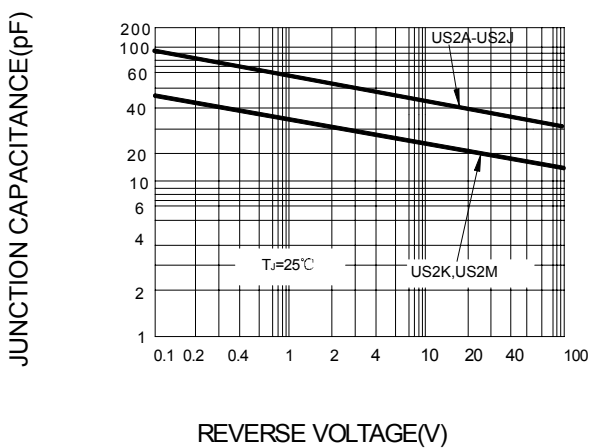

**FIG.6 – TYPICAL TRANSIENT THERMAL IMPEDANCE**

