


GLASS PASSIVATED FAST RECOVERY RECTIFIER

Reverse Voltage: 50 to 1000 Volts
Forward Current: 1.0 Ampere


FEATURES

- Glass passivated junction
- For Surface Mount Applications, Easy to pick and place
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High temperature soldering guaranteed: 260°C/10 seconds at terminals,
- Component in accordance to RoHS 2011/65/EU



MECHANICAL DATA

- Case: SMAF molded plastic over glass passivated chip
- Terminals: Solder plated
- Polarity: Color band denotes cathode end

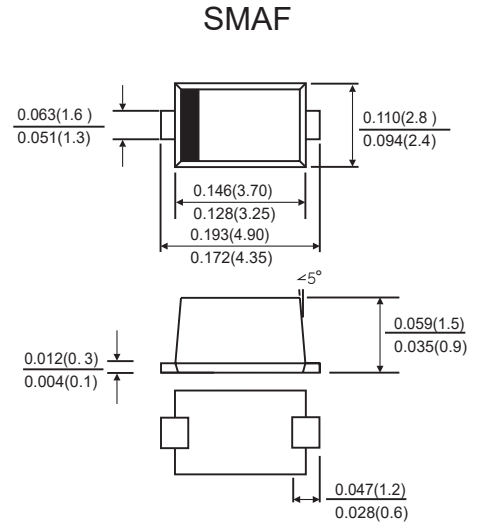

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

	Symbols	RS1AF	RS1BF	RS1DF	RS1GF	RS1JF	RS1KF	RS1MF	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current	$I(AV)$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30.0							Amps
Maximum Instantaneous Forward Voltage at 1.0 A	V_F	1.3							Volts
Maximum DC Reverse Current at rated DC blocking voltage	$T_A=25^\circ C$	5.0							μA
	$T_A=100^\circ C$								
Maximum reverse recovery time(Note1)	t_{rr}	150			250	500		ns	
Typical junction capacitance(Note2)	C_J	15.0							pF
Operating junction and storage temperature range	$T_J T_{STG}$	-55 to +150							$^\circ C$

Note : 1. Test conditions: $I_F=0.5A, I_R=1.0A, I_{RR}=0.25A.$

2. Measured at 1MHz and applied reverse voltage of 4.0 Volts D.C.

RATINGS AND CHARACTERISTIC CURVES

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

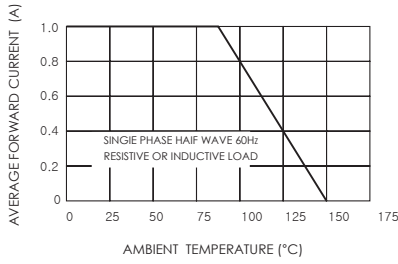


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

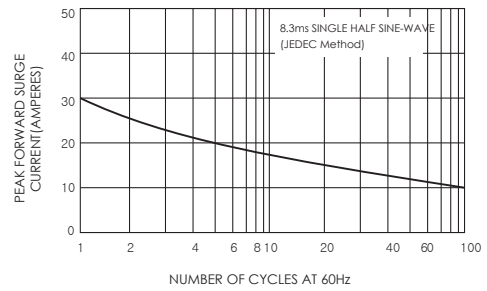


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

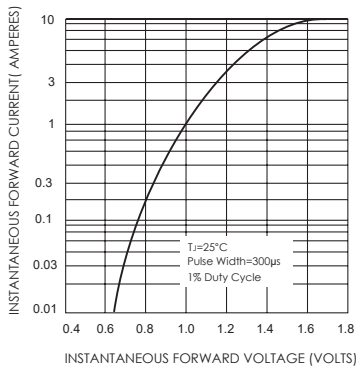


FIG.4-TYPICAL REVERSE CHARACTERISTICS

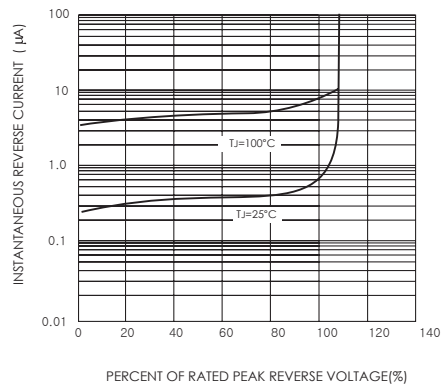


FIG.5-TYPICAL JUNCTION CAPACITANCE

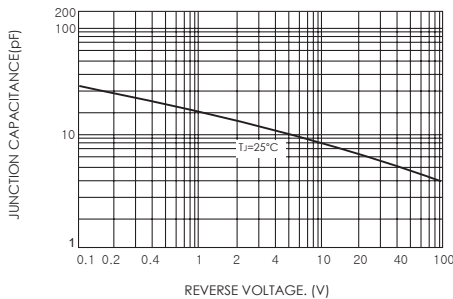


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

